


Sound absorption

Impedance tube (EN ISO 10534-2)

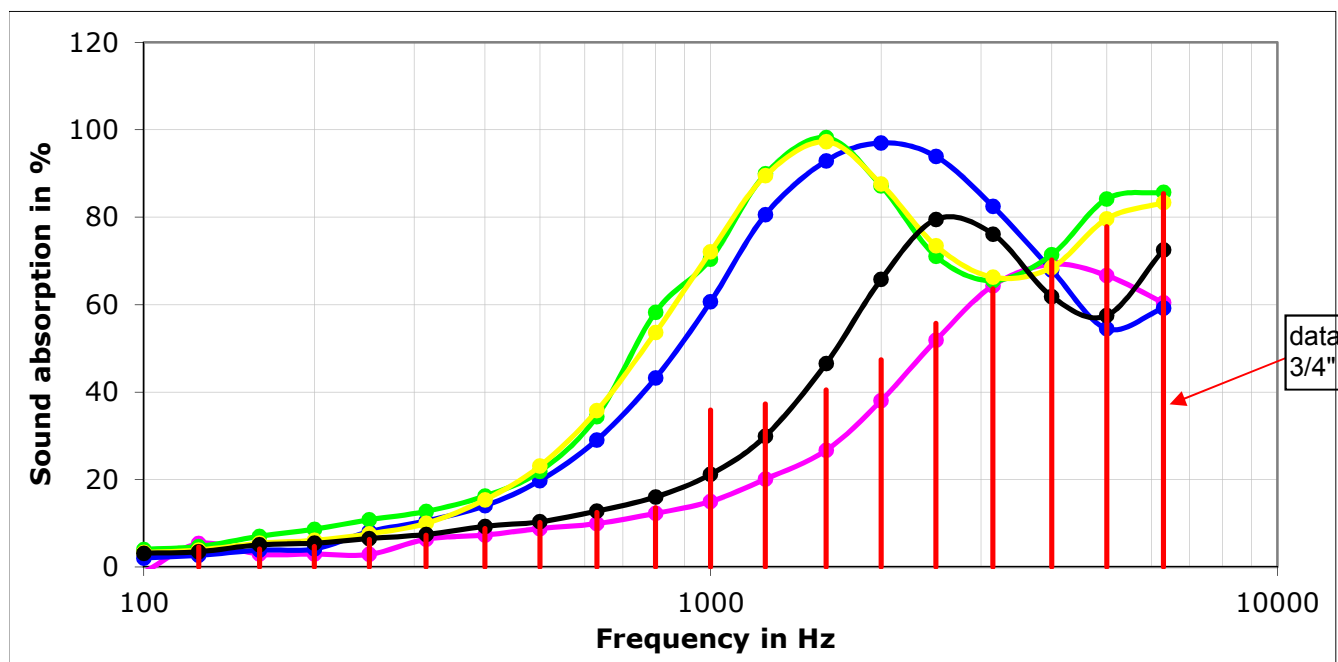

	Report	Description	Origin	Thick mm	NRC %	AP N.sec/m³
✓	2647 / 1	Fireflex T 30	Wetteren	20	16	168,2
✓	1926 / 2	Fireflex T 30 / PU epurex 25µm	Wetteren	20	46	2249,3
✓	1905 / 10	DBR foam D28160 3023 08/151 Middle	Louviers	20	48	2716
✓	889 / 8	D 30130 (middle)	Zgierz	20	48	4495,4
✓	822 / 14	FIREFLEX S305	Wetteren	20	26	277